




WINDSOR




SIZE



VARIAZIONE DI TONALITA'
SHADE VARIATION
VARIACION DE TONO
V2 lieve variazione – light variation – ligera variación

GLAZED PORCELAIN
PORCELANATO ESMALTADO

PEI 4

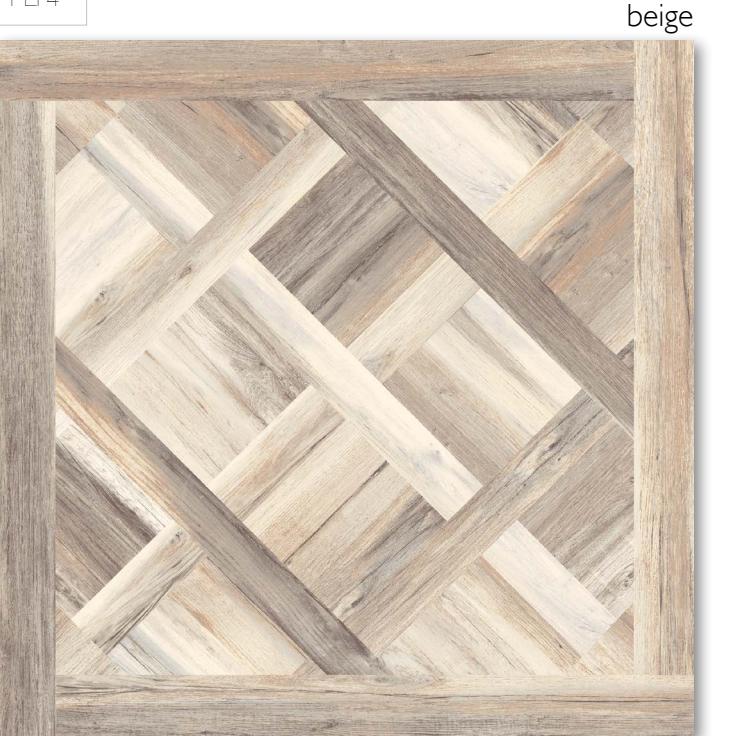


beige

PEI 4



grey

PEI 4

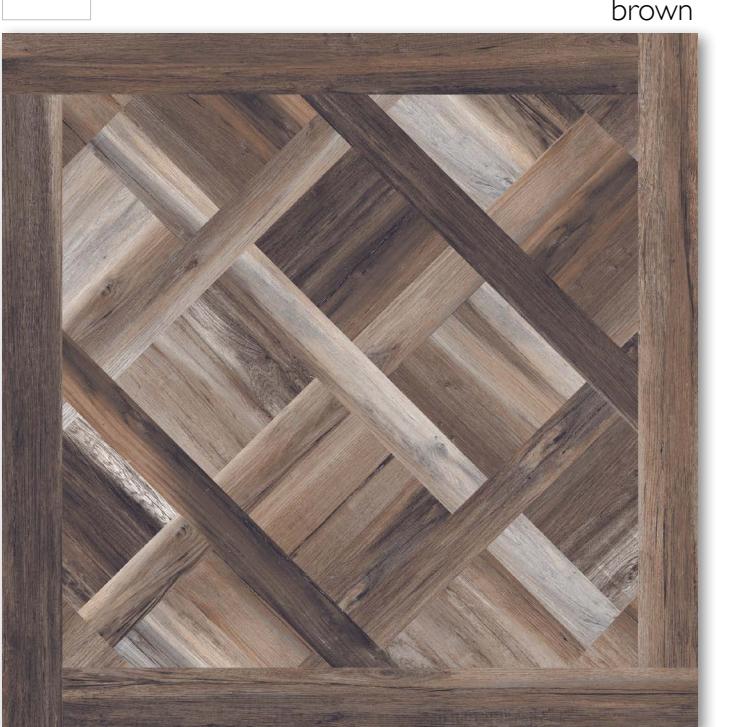


brown

polished-matt-60x60 24"x24"
polished-matt-80x80 32"x32"



DIGITAL TECHNOLOGY

Tech sheet



Packages

	Pcs. x	m2. x	kg x	x	m2 x	kg x
80x80	2	1,28	33	36	46,08	1188
60x60	4	1,44	34	40	57,60	1360

Physical properties

Norms	Glazed Porcelain Tiles	average value
UNI EN ISO 10545 - 3	Water Absorption	-0,5%
UNI EN ISO 10545 - 4	Bending strength	>35N /mm"
UNI EN ISO 10545 - 12	Frost resistance index	Frost proof
UNI EN ISO 10545 - 9	Resistance to thermal shock	Resistant
UNI EN ISO 10545 - 2	Thickness	± 1%
UNI EN ISO 10545 - 2	Surface Flatness	± 0,2%
UNI EN ISO 10545 - 13	Chemical resistance	No Damage
UNI EN ISO 10545 - 14	Stain resistance	>4
ANSI A 137.1 : 2012	Dinamic coefficient of friction "DCOF"	0,43